

Replaces DS5541-3

# DIM1600FSS12-A000

# Single Switch IGBT Module

DS5541-4 July 2014 (LN31768)

## FEATURES

- 10µs Short Circuit Withstand
- Non Punch Through Silicon
- Isolated Cu Base with Al<sub>2</sub>O<sub>3</sub> Substrates
- Lead Free construction

## **APPLICATIONS**

- High Power Inverters
- Motor Controllers

The Powerline range of high power modules includes half bridge, chopper, dual, single and bi-directional switch configurations covering voltages from 1200V to 6500V and currents up to 2400A.

The DIM1600FSS12-A000 is a single switch 1200V, n-channel enhancement mode, insulated gate bipolar transistor (IGBT) module. The IGBT has a wide reverse bias safe operating area (RBSOA) plus 10µs short circuit withstand. This device is optimised for traction drives and other applications requiring high thermal cycling capability.

The module incorporates an electrically isolated base plate and low inductance construction enabling circuit designers to optimise circuit layouts and utilise grounded heat sinks for safety.

## **ORDERING INFORMATION**

Order As:

## DIM1600FSS12-A000

Note: When ordering, please use the complete part number

### **KEY PARAMETERS**

V <sub>CES</sub>		1200V
V <sub>CE(sat)</sub> *	(typ)	2.2V
l <sub>c</sub>	(max)	1600A
I <sub>C(PK)</sub>	(max)	3200A

\* Measured at the power busbars, not the auxiliary terminals




Fig. 1 Circuit configuration



## **ABSOLUTE MAXIMUM RATINGS**

Stresses above those listed under 'Absolute Maximum Ratings' may cause permanent damage to the device. In extreme conditions, as with all semiconductors, this may include potentially hazardous rupture of the package. Appropriate safety precautions should always be followed. Exposure to Absolute Maximum Ratings may affect device reliability.

### T<sub>case</sub> = 25°C unless stated otherwise

Symbol	Parameter	Test Conditions	Max.	Units
V <sub>CES</sub>	Collector-emitter voltage	$V_{GE} = 0V$	1200	V
V <sub>GES</sub>	Gate-emitter voltage		±20	V
Ι <sub>C</sub>	Continuous collector current	$T_{case} = 85^{\circ}C$	1600	А
I <sub>C(PK)</sub>	Peak collector current	1ms, T <sub>case</sub> = 110°C	3200	А
P <sub>max</sub>	Max. transistor power dissipation	$T_{case} = 25^{\circ}C, T_j = 150^{\circ}C$	13890	W
l <sup>2</sup> t	Diode I <sup>2</sup> t value	$V_R = 0, t_p = 10ms, T_j = 125^{o}C$	400	kA <sup>2</sup> s
V <sub>isol</sub>	Isolation voltage – per module	Commoned terminals to base plate. AC RMS, 1 min, 50Hz	2500	V

### THERMAL AND MECHANICAL RATINGS

Internal insulation material:	$AI_2O_3$
Baseplate material:	Cu
Creepage distance:	20mm
Clearance:	10mm
CTI (Comparative Tracking Index):	>600

Symbol	Parameter	Test Conditions	Min	Тур.	Мах	Units
R <sub>th(j-c)</sub>	Thermal resistance – transistor	Continuous dissipation - junction to case	-	-	9	°C/kW
R <sub>th(j-c)</sub>	Thermal resistance – diode	Continuous dissipation - junction to case	-	-	20	°C/kW
R <sub>th(c-h)</sub>	Thermal resistance – case to heatsink (per module)	Mounting torque 5Nm (with mounting grease)	-	-	8	°C/kW
Tj	Junction temperature	Transistor	-	-	150	°C
		Diode	-	-	125	°C
T <sub>stg</sub>	Storage temperature range	-	-40	-	125	°C
		Mounting – M6	-	-	5	Nm
	Screw torque	Electrical connections – M4	-	-	2	Nm
		Electrical connections – M8	-	-	10	Nm

# **ELECTRICAL CHARACTERISTICS**

### T<sub>case</sub> = 25°C unless stated otherwise.

Symbol	Parameter	Test Conditions	Min	Тур	Мах	Units
		$V_{GE} = 0V, V_{CE} = V_{CES}$			2	mA
I <sub>CES</sub>	Collector cut-off current	$V_{GE} = 0V, V_{CE} = V_{CES}, T_{case} = 125^{\circ}C$			50	mA
I <sub>GES</sub>	Gate leakage current	$V_{GE} = \pm 20V, V_{CE} = 0V$			8	μA
$V_{\text{GE(TH)}}$	Gate threshold voltage	$I_{C} = 80 \text{mA}, V_{GE} = V_{CE}$	4.5	5.5	6.5	V
M	Collector-emitter	V <sub>GE</sub> = 15V, I <sub>C</sub> = 1600A		2.2	2.8	V
V <sub>CE(sat)</sub>	saturation voltage	$V_{GE} = 15V, I_C = 1600A, T_j = 125^{\circ}C$		2.6	3.3	V
I <sub>F</sub>	Diode forward current	DC			1600	А
I <sub>FM</sub>	Diode maximum forward current	t <sub>p</sub> = 1ms			3200	А
N	V <sub>F</sub> Diode forward voltage	I <sub>F</sub> = 1600A		2.1	2.4	V
VF		I <sub>F</sub> = 1600A, T <sub>j</sub> = 125°C		2.1	2.4	V
C <sub>ies</sub>	Input capacitance	$V_{CE}$ = 25V, $V_{GE}$ = 0V, f = 1MHz		180		nF
Qg	Gate charge	±15V		18		μC
C <sub>res</sub>	Reverse transfer capacitance	V <sub>CE</sub> = 25V, V <sub>GE</sub> = 0V, f = 1MHz				nF
L <sub>M</sub>	Module inductance			15		nH
R <sub>INT</sub>	Internal transistor resistance			140		μΩ
SC <sub>Data</sub>	Short circuit current, I <sub>SC</sub>	$\begin{split} T_{j} &= 125^{\circ}C, \ V_{CC} = 900V \\ t_{p} &\leq 10 \mu s, \ V_{GE} \leq 15V \\ V_{CE \ (max)} &= V_{CES} - L^{*} x \ dl/dt \\ IEC \ 60747-9 \end{split}$		9000		A

# Note:

L is the circuit inductance +  $L_M$ 

Caution: This device is sensitive to electrostatic discharge. Users should follow ESD handling procedures


## **ELECTRICAL CHARACTERISTICS**

T<sub>case</sub> = 25°C unless stated otherwise


Symbol	Parameter	Test Conditions	Min	Тур.	Max	Units
t <sub>d(off)</sub>	Turn-off delay time			1250		ns
t <sub>f</sub>	Fall time	I <sub>C</sub> = 1600A V <sub>GE</sub> = ±15V		180		ns
E <sub>OFF</sub>	Turn-off energy loss	$V_{GE} = \pm 13V$ $V_{CE} = 600V$		300		mJ
t <sub>d(on)</sub>	Turn-on delay time	$R_{G(ON)} = 1.5\Omega$		250		ns
t <sub>r</sub>	Rise time	R <sub>G(OFF)</sub> = 1.5Ω L <sub>S</sub> ~ 100nH		200		ns
E <sub>ON</sub>	Turn-on energy loss			80		mJ
Q <sub>rr</sub>	Diode reverse recovery charge	I <sub>F</sub> = 1600A		150		μC
I <sub>rr</sub>	Diode reverse recovery current	$V_{CE} = 600V$		750		А
E <sub>rec</sub>	Diode reverse recovery energy	dI <sub>F</sub> /dt = 8200A/µs		90		mJ

### T<sub>case</sub> = 125°C unless stated otherwise

Symbol	Parameter	Test Conditions	Min	Тур.	Max	Units
t <sub>d(off)</sub>	Turn-off delay time			1500		ns
t <sub>f</sub>	Fall time	$I_{C} = 1600A$ $V_{GE} = \pm 15V$		200		ns
E <sub>OFF</sub>	Turn-off energy loss	$V_{GE} = \pm 10V$ $V_{CE} = 600V$		350		mJ
t <sub>d(on)</sub>	Turn-on delay time	$R_{G(ON)} = 1.5\Omega$		350		ns
t <sub>r</sub>	Rise time	R <sub>G(OFF)</sub> = 1.5Ω L <sub>S</sub> ~ 100nH		220		ns
E <sub>ON</sub>	Turn-on energy loss	25 100111		150		mJ
Q <sub>rr</sub>	Diode reverse recovery charge	I <sub>F</sub> = 1600A		350		μC
I <sub>rr</sub>	Diode reverse recovery current	$V_{CE} = 600V$		900		А
E <sub>rec</sub>	Diode reverse recovery energy	dI <sub>F</sub> /dt = 7500A/µs		160		mJ

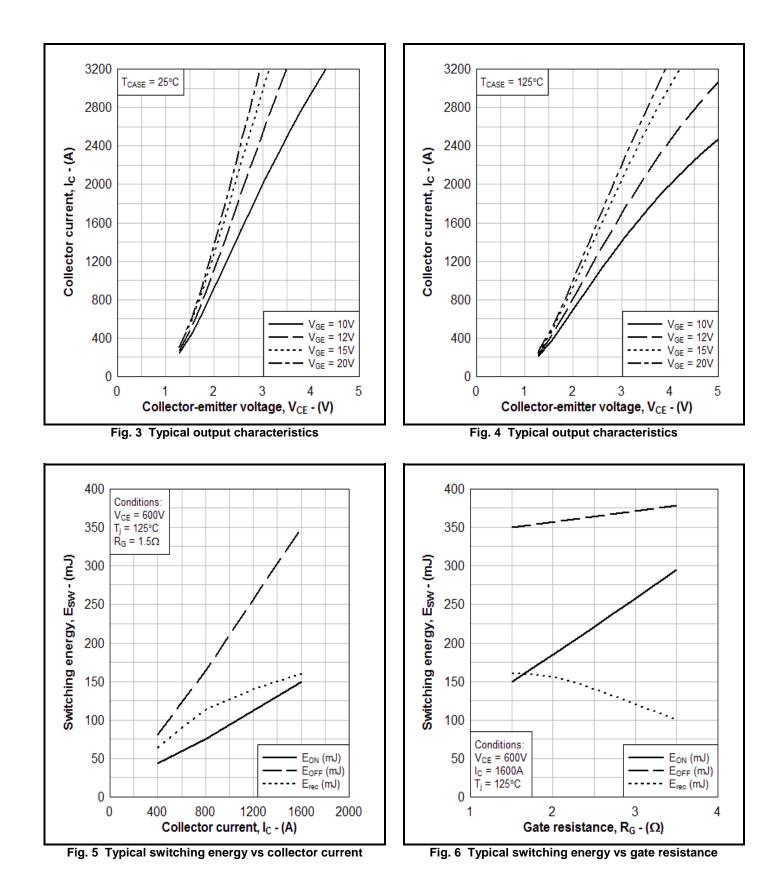

Caution: This device is sensitive to electrostatic discharge. Users should follow ESD handling procedures

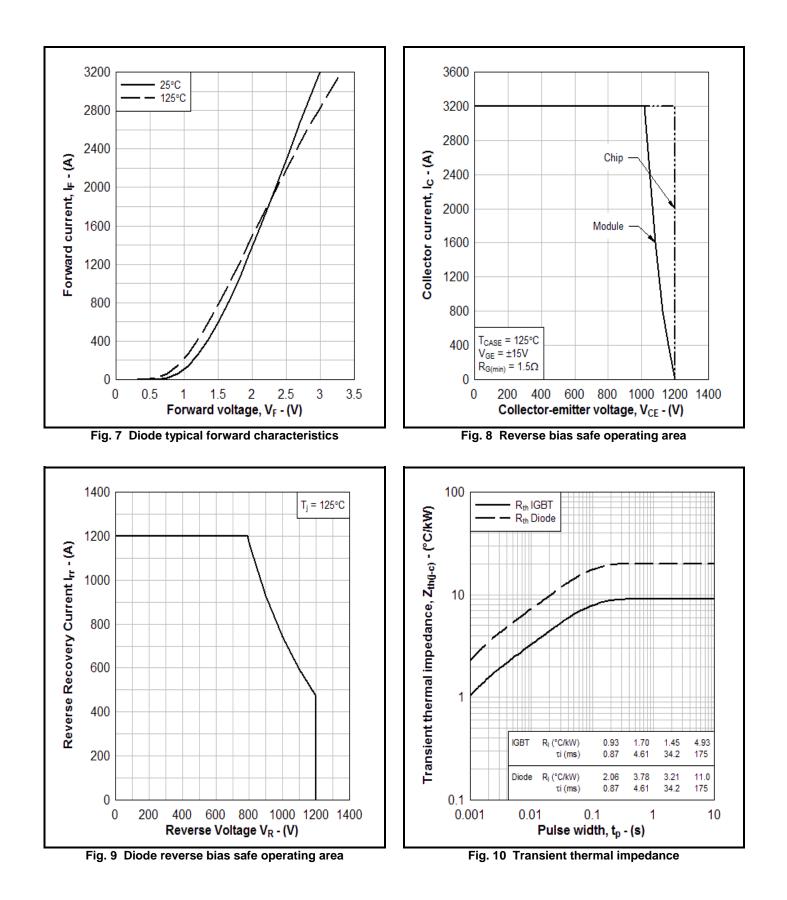


Caution: This device is sensitive to electrostatic discharge. Users should follow ESD handling procedures.



### PACKAGE DETAILS

For further package information, please visit our website or contact Customer Services. All dimensions in mm, unless stated otherwise. **DO NOT SCALE.** 

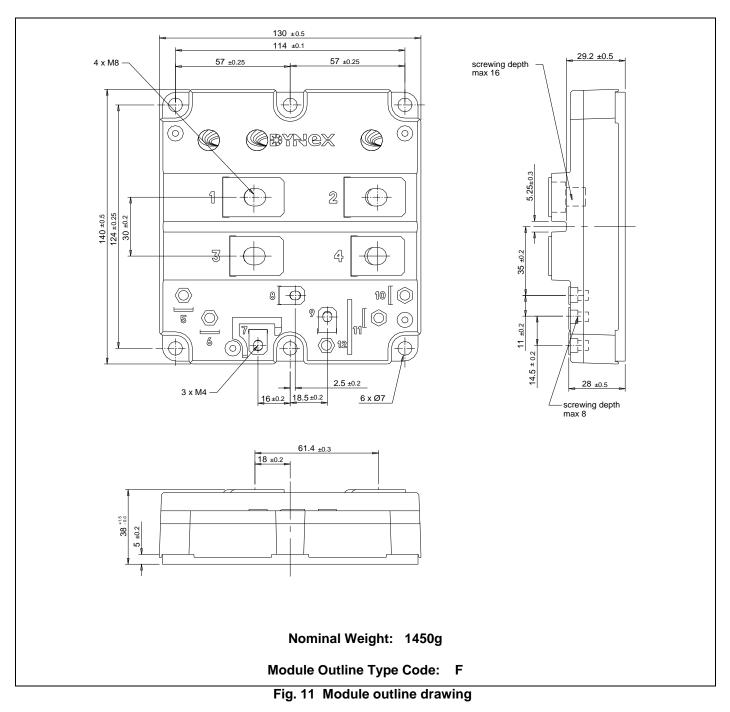

Caution: This device is sensitive to electrostatic discharge. Users should follow ESD handling procedures

### **IMPORTANT INFORMATION:**

This publication is provided for information only and not for resale.

The products and information in this publication are intended for use by appropriately trained technical personnel.

Due to the diversity of product applications, the information contained herein is provided as a general guide only and does not constitute any guarantee of suitability for use in a specific application. The user must evaluate the suitability of the product and the completeness of the product data for the application. The user is responsible for product selection and ensuring all safety and any warning requirements are met. Should additional product information be needed please contact Customer Service.

Although we have endeavoured to carefully compile the information in this publication it may contain inaccuracies or typographical errors. The information is provided without any warranty or guarantee of any kind.

This publication is an uncontrolled document and is subject to change without notice. When referring to it please ensure that it is the most up to date version and has not been superseded.

The products are not intended for use in applications where a failure or malfunction may cause loss of life, injury or damage to property. The user must ensure that appropriate safety precautions are taken to prevent or mitigate the consequences of a product failure or malfunction.

The products must not be touched when operating because there is a danger of electrocution or severe burning. Always use protective safety equipment such as appropriate shields for the product and wear safety glasses. Even when disconnected any electric charge remaining in the product must be discharged and allowed to cool before safe handling using protective gloves.

Extended exposure to conditions outside the product ratings may affect reliability leading to premature product failure. Use outside the product ratings is likely to cause permanent damage to the product. In extreme conditions, as with all semiconductors, this may include potentially hazardous rupture, a large current to flow or high voltage arcing, resulting in fire or explosion. Appropriate application design and safety precautions should always be followed to protect persons and property.

#### **Product Status & Product Ordering:**

We annotate datasheets in the top right hand corner of the front page, to indicate product status if it is not yet fully approved for production. The annotations are as follows:-

Target Information:	This is the most tentative form of information and represents a very preliminary specification. No actual design work on the product has been started.
Preliminary Information:	The product design is complete and final characterisation for volume production is in progress. The datasheet represents the product as it is now understood but details may change.
No Annotation:	The product has been approved for production and unless otherwise notified by Dynex any product ordered will be supplied to the current version of the data sheet prevailing at the time of our order acknowledgement.

All products and materials are sold and services provided subject to Dynex's conditions of sale, which are available on request.

Any brand names and product names used in this publication are trademarks, registered trademarks or trade names of their respective owners.

### **HEADQUARTERS OPERATIONS**

#### DYNEX SEMICONDUCTOR LTD

Doddington Road, Lincoln, Lincolnshire, LN6 3LF, United Kingdom Fax: +44(0)1522 500550 Tel: +44(0)1522 500500 Web: <u>http://www.dynexsemi.com</u>

## CUSTOMER SERVICE

### DYNEX SEMICONDUCTOR LTD

Doddington Road, Lincoln, Lincolnshire, LN6 3LF, United Kingdom Fax: +44(0)1522 500020 Tel: +44(0)1522 502753 / 502901 Email: Power\_solutions@dynexsemi.com

© Dynex Semiconductor Ltd. 2002.

Technical Documentation – Not for resale.